



Bulk head push in fitting

ARTICLE NO: 2130

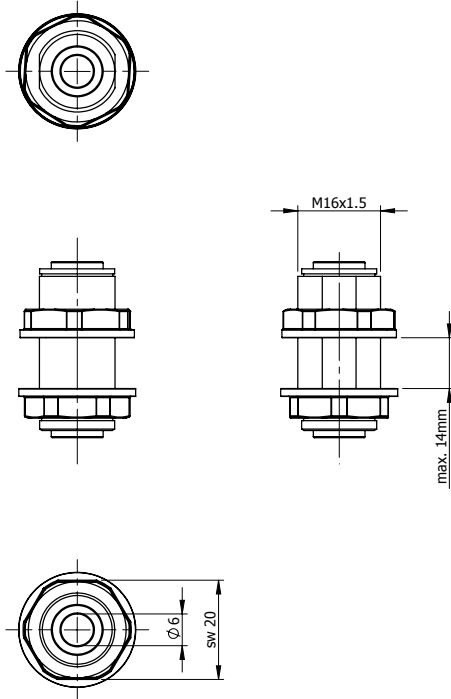

Information

| | |
|------------------------|------------------------------------|
| Material: | POM |
| Temperature range*: | -40°C / 105°C |
| Thermal conductivity: | 0.31 W/m.K |
| Abrasion resistance: | Good |
| Electrical insulation: | Excellent |
| Tensile force: | 10-20 Mpa |
| Special properties: | Low friction, high stiffnes |
| Pressure max.: | 10 bar |

To be used with Ø 6 mm tubing.

* At temperatures below 0°C, antifreeze has to be added to the wash water.